

Impeder Jackets & Disposable Impeders

**alpha
Metall**

Disposable Impeders

Throughflow & Returnflow



Available from 8 - 90mm Diameter with different types of connectors.



Quick coupling



Compression Fitting
(Metric)




SAE45° Flared Fitting
or JIC37° Flared Fitting



CERAMIC IMPEDER

Ceramic Impeder Jackets available on request

Impeder Jacket Tubes

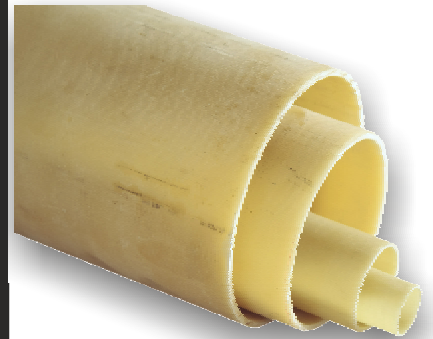

Dimension OD / ID [mm]	Standard length
10 / 8	1050mm
11 / 9	
12 / 10	
14 / 12	
16 / 13	
16 / 14	
18 / 15	
18 / 16	
20 / 16	
20 / 17	
22 / 19	
23 / 20	
24 / 22	
25 / 22	
25 / 23	
28 / 25	
34 / 30	
34 / 31	
39 / 35	
45 / 41	
50 / 46	
55 / 51	
60 / 56	
65 / 59	
70 / 64	
75 / 69	
80 / 74	
85 / 79	
90 / 84	
100 / 94	
110 / 104	

All Impeder Casings can be delivered ready cut to customer's length.
Other diameters on request.
Coatings available on request.